



A2G FIBERCO
ELECTRÓNICA DE PRECISIÓN INSTRUMENTACIÓN INDUSTRIAL



xGenius the latest in testing

in Test we Trust

ALBEDO xGenius is a multi-technology tester equipped with 8' screen and all the features you need to install and maintain telecom networks up to 10Gigabit Ethernet It supports legacy and new generation interfaces in order to verify Ethernet / IP, PTP, SyncE, ToD, IRIG-B, T1 / E1, C37.94, RS-232, G703 and check protocols such as GOOSE, SV or MMS. It is suitable for measuring legacy and next-gen networks as it has the most common interfaces. Field engineers do not need to carry any more several testers or multiple modules to turn up and monitor telecom infrastructures.

xGenius is equipped with all of the features you may need or imagine such including BER, RFC2544, eSAM, Multistream, MPLS, Jitter, Wander, etc. to permit the verification of the transmission layer in those terms of performance and quality required to support audio, video or critical data applications.

Built-in Rubidium / GPS clock

The integrated GPS/GLONASS receiver allows easy connection and use while fast acquisitions and excellent accuracy minimizing the time impairments of external devices. This an ideal solution to synchro-

nize thanks to top performance in hold-over mode while top accuracy in a real hand-held battery operated IP tester.

Power Utilities

Power utility companies must protect high voltage lines and monitor them constantly. Communication between power substations using the standard C37.94 is fundamental order to ensure correct operation while controlling every single alarm and failure. With xGenius a fully integrated test is possible.

Commissioning, Installation, & Maintenance tester"

Mobile telecom

Operators have different synchronization requirements. Some of them running 3G may still maintain legacy E1 solely for syntonization. Those focused on LTE, see the impending need for distributing phase-synchronization and also want to avoid having to install GPS receivers at every single cell site. Alternatives are SyncE and PTP that simplify the architecture and can be turned-up with ALBEDO testers.

ALBEDO

xGENIUS

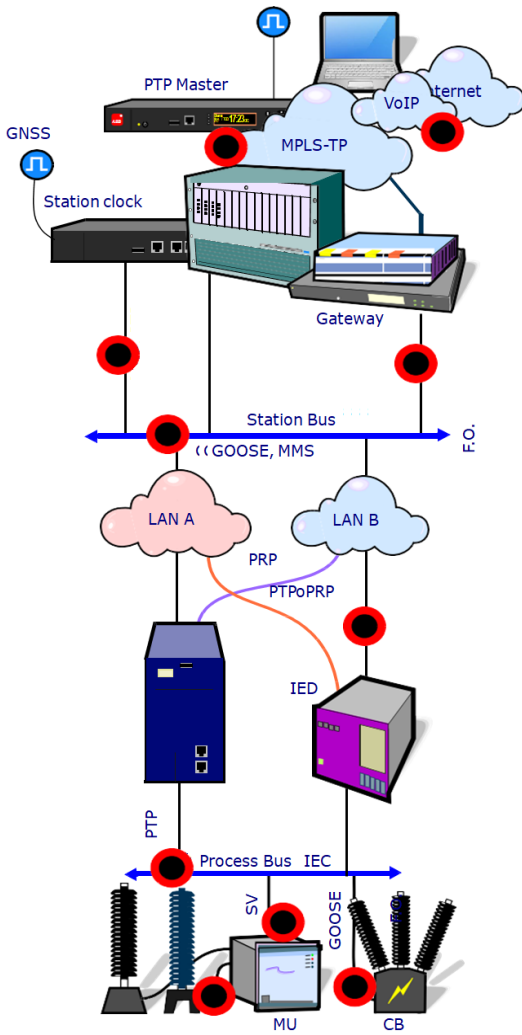


Fig2. Testing points.

10 Gigabit Ethernet

Users of xGenius can rely on the traffic generation to set up and modify any IP/Ethernet header.

Traffic Scan and Discovering

The unit can quickly scan the network traffic to select those flows to be tested.

RFC 6349

Throughput also depends on the size of TCP window, buffers, latency, errors, packet loss etc. that requires TCP retransmissions. The RFC 6349 address all these factors to get a more accurate view of the TCP/IP quality services.

RFC 2

xGenius verifies the performance of the network testing throughput, frame loss, latency, jitter and burst,

that can be executed as symmetric and asymmetric

MPLS, PTP, NTP, SyncE, IRIG-B, TDM, Serial, C37.94

Synchronization

LTE networks are demanding of accurate frequency and phase time references, particularly those architectures that consider small cells where the frequency re-utilization is a key factor of performance. The tester can set up the synchronization network with an external reference or recovering it from data, or using the built-in Rubidium disciplined with GPS.

SyncE

Complete analysis and generation of the signal, SSM and SSM protocols can be captured and decoded.

PTP

During the installation of PTP connectivity problems may occur between the master and slave units. When troubleshooting these links, the tester can be used in Terminate mode to capture PTP messaging on both the transmit and receive test ports up to 10 Gbit/s. The tester simultaneously generates, receives, and captures PTP messages on the circuit under test.

IRIG-B

It monitors IRIG-B00X, B12X, B13X, B14X, B15X, B22X. Balanced and unbalanced inputs. Includes IRIG-B frame analysis, phase (TE) and frequency test including wander TIE / MTIE / TDEV.

T1, E1 and Datacom

xGenius provides a scalable test solution for T1, E1 and datacom that includes full set of physical layer tests for balanced / unbalanced circuits including BERT, VF, signal level, round trip delay and one-way-delay with GPS.

OWD assisted with GPS

One-way delay

One-way Delay (OWD) saves hours of troubleshooting by detecting asymmetric traffic delays. Accuracies 10 times greater than most common SLA can be attained, network providers to differentiate their offering and allowing network planners to understand the delay tolerances affecting their applications

C37.94 test

Field engineers can use this tester to turn up new C37.94 deployments, or to troubleshoot teleprotection relays and multiplexer by means features such as bit error rate testing (BERT), G.821, events analysis/generation, optical power meter one-way / round-trip delay, etc. to facilitate engineers to verify protection system that prevent outages in a power substations.


Two traffic generators

Wirespeed packet capture

xGenius is equipped with a unique technology that ensures packet capture of selected flows and then save them in PCAP format of live traffic in full duplex mode. You can overcome most of the limitations of capture devices, firewalls, protocol analyzers running on Laptops or PCs.



Fig3. Modules for IRIG-B, Datacom, C37.94, Codirectional, VF...

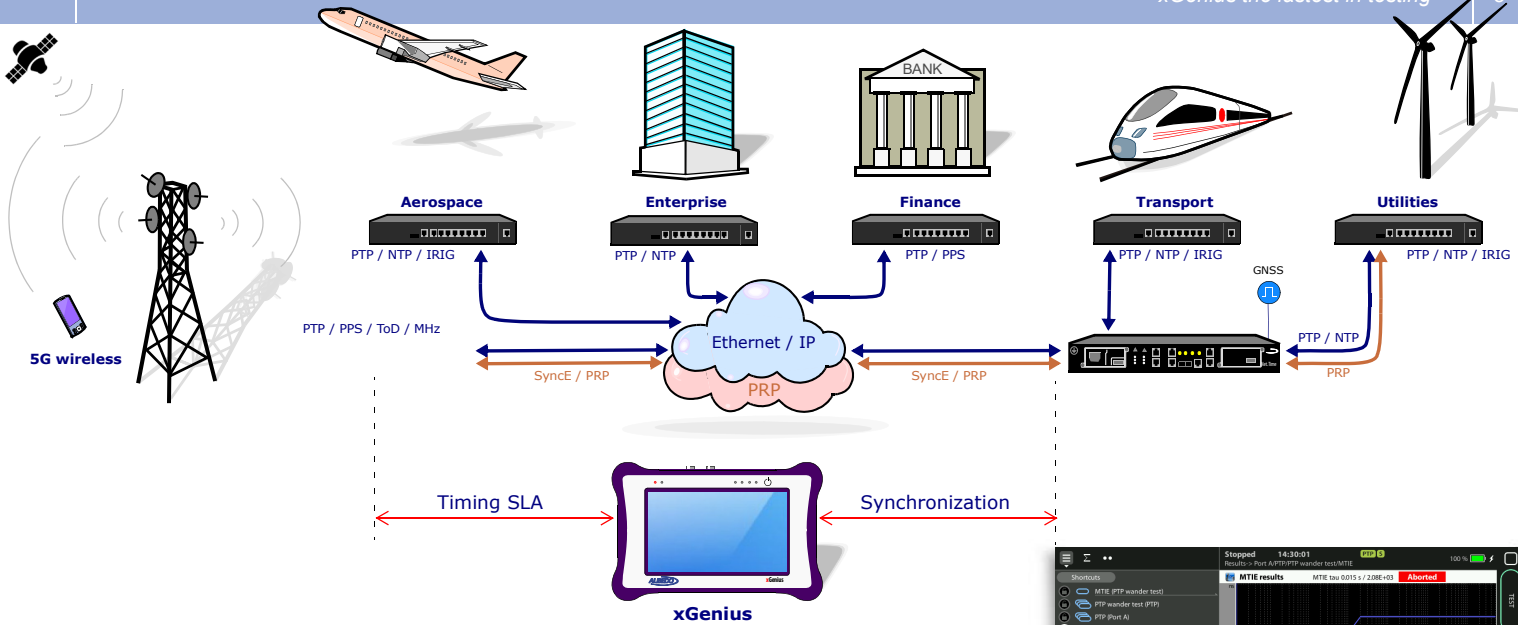

Verify is easy now

The value of innovation

Engineers often have to repeat the same test several times, for them this instrument provides the facilities to execute automatic script that can be distributed by email, while the results are saved on disks. The unit also support SNMP then it can store configuration, management and result information.

Double-port field unit

xGenius is a modular tool built in a rugged case with many options can be activated by software. Ideal for field engineers and very useful at labs for installation, commissioning and maintenance of infrastructures to provide a valuable insights to design networks and solving complex issues.

New GUI

The GUI is easy to learn while the engineer may navigate using the touchscreen with a lot of graphical facilities particularly the new outstanding feature of automatic set ups. It is also possible to control remotely by means of VNC to grant full access to the unit using the same layout, but password controlled access, to configure, execute, and get results directly in a public/private IP.

Packets, Circuits & Clocks

Everything is covered by Ether10. Genius a multitechnology tester to install and troubleshoot telecom services based on 10GbE, GbE, SyncE, PTP, GOOSE, IRIG-B, T1, E1, IEEE C37.94, Datacom, VF and OWD with GPS because it has been designed to deploy and troubleshoot brand new and legacy networks.



KEY FEATURES

- Built-in Rubidium, OCXO, GNSS receiver
- PTP master/slave emulation
- Wander T1, E1, PTP, SyncE
- 1PPS measurement
- TE max |TE|, Constant and dynamic TE components
- ESMC / SSM full support
- Y.1564 (e-SAM) FTD, 2-way FDV, FDV, 2-way FTD, FLR SES, PEU and PEA
- Y.1731 QoS statistics
- Captures any Ethernet protocol and save it in PCAP
- GOOSE and SV time offset and propagation delay
- (A)Symm Y.1564, RFC-2544
- T1, E1, Jitter & Pulse mask
- VNC, LAN or Wi-Fi control
- Hot-swappable modules
- One-way & round trip delay

BENEFITS

- Quality hold-over
- All-in-one solution
- 8 inches capacitive screen
- 100% hardware included
- Field tester extra rugged

INTERNAL RUBIDIUM

- Freerun (No GPS): Output freq. accuracy on shipment (24 h. warm up): $\pm 5.0e-11$
- GPS Locked: Time/Phase Accuracy to UTC: ± 20 ns at 1σ after 24 h lock
- Hold-over accuracy (after 24h locked) frequency $1.5e-11/24$ h time: ± 100 ns/2h ± 1.0 μ s/24h

© ALBEDO TELECOM

Ethernet / IP / IEC-61850	
Interfaces	<ul style="list-style-type: none"> • 2xSFP / SFP+ : 10GBASE-SR, 10GBASE-LR, 10GBASE-ER, 1000BASE-SX • 1000BASE-LX, 1000BASE-ZX, 1000BASE-BX, 100BASE-FX, 100BASE-TX • 2xRJ45: 1000BASE-T, 100BASE-T, 10BASE-T, PoE detection/ transparency
Generation (8 streams)	<ul style="list-style-type: none"> • Traffic generation and analysis features up to 10 Gb/s, equivalent to 15 millions of frames, if frame size is set to 64 bytes. • VLAN: Single VLAN support, Q-in-Q stacking, VID, DEI, S-VLAN, C-VLAN, and Priority codepoint • Bandwidth Profile: Constant, in bit/s and frames/s, Periodic Burst, in high/low traffic, Ramp, in high/low traffic, Poisson • Layer 1 BER: HF, LF, MF, Long/Short continuous random, PRBS 231-1, A-seed, B-seed, mixed-frequency • Layer 2-4: PRBS 211-1, PRBS 215-1, PRBS 220-1, PRBS 223-1, PRBS 231-1 along with their inverted versions, user (32 bits)
Filters for Statistics (up to 8 simultaneously)	<ul style="list-style-type: none"> • Ethernet Selection: MAC address, Type/Length, C-VID, S-VID, CoS and Priority with selection mask • IPv4 and IPv6 Selection: address, protocol, DSCP, Flow (v6): single value or range. UDP Selection: port: single value or range
Packet Capture	<p>Capture Filters</p> <ul style="list-style-type: none"> • IEC 61850: GOOSE, SV, MMS preconfigured filters • Generic by 16-bit masks and user defined offset. • Ethernet MAC address, Ethernertype, VLAN-VID, VLAN-CoS, S-VLAN / C-VLAN • IPv6 / IPv4 Filters: Address, TCP, UDP, Telnet, FTP, DSCP field, single value and range <p>Storage in PCAP format</p>
RFC-2544 Y.1564 RFC-6349	<ul style="list-style-type: none"> • RFC 2544: Throughput, Latency, Frame Loss, Back-to-back, Recovery • eSAM: test up to 8 non-color or 4 color aware services. Configuration: CIR, EIR, max. throughput for each service • Performance test with FTD, FDV, FLR and availability results for all services • RFC 6349: active/passive modes, MTU/MSS/BB configuration, Round-Trip Time, Window Sweep, Transfer Time, TCP efficiency, Buffer delay
ICMP	<ul style="list-style-type: none"> • RFC 792: IP ping / Traceroute, Generation of ICMP echo request: Dest. IP address, Packet length, Generation interval • Analysis of ICMP echo reply: Round trip time, Lost packets, Time-To-Live Exceeded, Port unreachable

Synchronization / PTP / SyncE / Wander	
Synchronous Ethernet	<ul style="list-style-type: none"> • Internal Oscillator: Rubidium or OCXO or default (<2.0 ppm) all disciplined to GNSS or alternative time references • Time References: ToD, 1 pps, E1/T1, SyncE, 10/2.048/1.544 MHz (input) - ToD, 1 pps 10/2.048 MHz (output) • Line Analysis: frequency (MHz), offset (ppm), drift (ppm/s) [clause 10]; Offset Generation: ±125 ppm (0.001 ppm) as per ITU-T 0.174 • PTP wander analysis/generation [ITU-T 0.174 section 8.4] and MTIE / TDEV measurement [ITU-T 0.172 clause 10] • SyncE analysis/generation / Decoding ESMC and SSM [ITU-T G.8264]
PTP / IEEE 1588(v2)	<ul style="list-style-type: none"> • Precision Time Protocol (PTP): Master & Grandmaster id., Priority 1-2, Class, Accuracy, Variance, Time source • PTP over UDP encapsulation, PTP Generation / Analysis / Emulation; hardware-assisted Decoding; End-point and Through modes • Counts: Sync Inter Arrival Delay (IAD) Avg/Curr; Packet Total Delay (PTD): Std Dev/Range; Packet Delay Variation (PDV): Cur/Max/Avg • Two-way TE, max. TE on PTP. Low/High frequency TE, Constant/Dynamic TE components. Frequency offset master vs. local clock (ppm)

TI / EI / Datacom / C37.94 / IRIG-B / GOOSE	
Interfaces	<ul style="list-style-type: none"> • Unbalanced (BNC) 75 Ω and balanced (RJ-45) 120 Ω; Balanced (Bantam) 100 Ω and balanced (RJ-48) 100 Ω • Balanced (RJ-45) 120 Ω Balanced (Bantam) 100 Ω (AT-1544 only) and balanced (RJ-48) 100 Ω • Unbalanced (BNC) 75 Ω Analogue voice frequency audio port • Additional balanced secondary TI, EI port 0 to -6dB, nominal and PMP -20dB • Bit Rate: 1.544 / 2.048 Mbit/s ± 3ppm. Codes: HDB3 / AMI • 4 x SMA: Clock Source: Internal Timing: 1.544MHz, 2.048 MHz ± 25000 ppm; External Timing; Recovery from Rx Timing (Loop Timing)
BERT	<ul style="list-style-type: none"> • Unframed: FAS / FAS+CRC4. PCM30: FAS+CAS / FAS+CRC • Standard, non-standard PRBS, and user patterns. Transmit Error Rate • Force Single Error: Bit, Frame, CRC, and BPV (Bipolar Violation); Alarms, Errors Count; G.826, G.821, and M.2100
Datacom	<ul style="list-style-type: none"> • Smart Serial 26p DTE / DCE ports. DTE, DCE emulation and monitor • V.11/X.24, V.24/V.28, V.24/V.35, V.24/V.11 (V.36/RS449), EIA530 and EIA-530A. Codirectional according G.703 • Rate: 50, 60 bit/s, 1.2, 2.4, 4.8, 8, 9.6, 16, 19.2, 32, 48, 72, 128, 144, 192, 1544 kbit/ Nx56 kbit/s; Nx64 kbit/s, up to 10 Mbit/s
Jitter & Wander	<ul style="list-style-type: none"> • Overpass 0.172: Jitter level, tolerance, transfer and Event detection. 100% digital based generation and analyzer • Wander Generation and Measurements (TIE, MTIE, TDEV). Wander results from 20 to 100 000s
Pulse Mask	<ul style="list-style-type: none"> • Pulse mask compliance: ANSI T1.102-1999, ITU-T G.703; PASS / FAIL function with Persistent Graphic Display scope • Nominal 2.37V for Coaxial Pair 75 Ohm, Nominal 3.00V for Symmetrical Pair 120 Ohm
C37.94	<ul style="list-style-type: none"> • Test Rate: N x 64 kbit/s; Frame/Unframed BER; ITU-T G.821: ES, SES, UAS, DM. Results with pass / fail indications • Frequency (Hz), Deviation (ppm), Max deviation; Round Trip Delay (ms), One-way Delay synchronized with GPS • Defects: LOC, AIS, LOF, RDI, LSS, All 0, All 1; Anomalies: FAS, TSE, Slip. Optical Power Meter
IRIG-B	<ul style="list-style-type: none"> • IRIG-B00X, B12X, B13X, B14X, B15X, B22X monitoring. Balanced and unbalanced inputs. • IRIG-B frame analysis, TE / TIE / MTIE / TDEV analysis, frequency offset (ppm) and frequency drift (ppm/s) analysis

Ergonomics	
Filed tester	• Size: 260 x 160 x 63 mm, Weight: <2.0 kg, IP-54, Touchscreen: 8 inch, Batteries up to 24 hs

